


PCIE-2221NP

Dual Port Copper 10GbE Ethernet PCI Express Server Adapter with Intel® X550-AT2

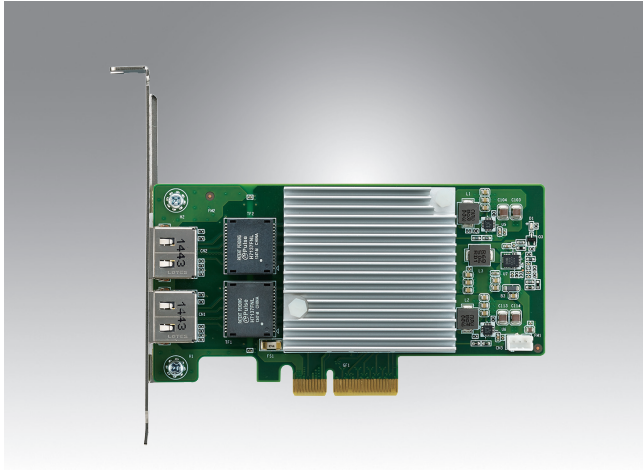

Features

- Intel® X550 Controller
- 1 or 2 10GbE Base-T (RJ45) ports
- PCIe Gen.3 x4 host interface
- Low profile form factors
- Supports SR-IOV based virtualization



Introduction

Advantech's PCIE-2221NP is a low-profile dual port 10GbE Ethernet PCI Express server adapter based on the Intel® X550-AT2 Ethernet Controller. By supporting a PCI Express gen. 3 x4 host interface, this adapter provides sufficient bandwidth for line rate traffic on the two 10GbE ports. Improved support for virtualization, including VMDq and VEB, makes the PCIE-2221NP a perfect fit for virtualized environments and applications with network overlays. PCIE-2221NP can be used to achieve high densities of network interfaces on servers and platforms for networking as well as industrial applications.

Specifications

Controller	Controller	Intel® X550
	Physical Functions	2
	Virtual Functions	128
Ethernet	PCI Express Lanes	x4
	Speed	Gen 3
	Port Number	1 or 2
	Ports	10GbE Base-T (RJ45)
Networking	LAN Bypass	Not supported
Power	Voltage	+12V
	Watts	12.5W
Mechanical Design	Board Dimension (D x W)	167 x 68.9 mm
	Bracket	Full height and half height options available
Environment	Operating Humidity	0 to 90% (non-condensing)
	Operating Temperature	0 ~ 45 °C (32 ~ 113 °F)
	Storage	-40 ~ 65 °C (-40 ~ 149 °F)
Certification	EMC	CE/FCC Class A
	Certification	KCC
Compatibility	OS Version	Win7 x64 / Win10 x64 / Win2012R2 / CentOS Linux release 7.3 / Red Hat Enterprise Linux Server 7.2

Ordering Information

Part Number	Description
PCIE-2221NP-00A1E	2-port 10GBase-T Ethernet PCI Express Server Adapter with Intel® X550 controller
PCIE-2221NP-01A1E	1-port 10GBase-T Ethernet PCI Express Server Adapter with Intel® X550 controller