

R10L100-67T2ST

10.4" Full IP67 Stainless Chassis Display



KEY FEATURES

- 10.4", 1024 x 768
- Chassis
- Full IP67 waterproof and dustproof
- Stainless housing SUS 316/AISI 316
- VESA mount
- VGA input

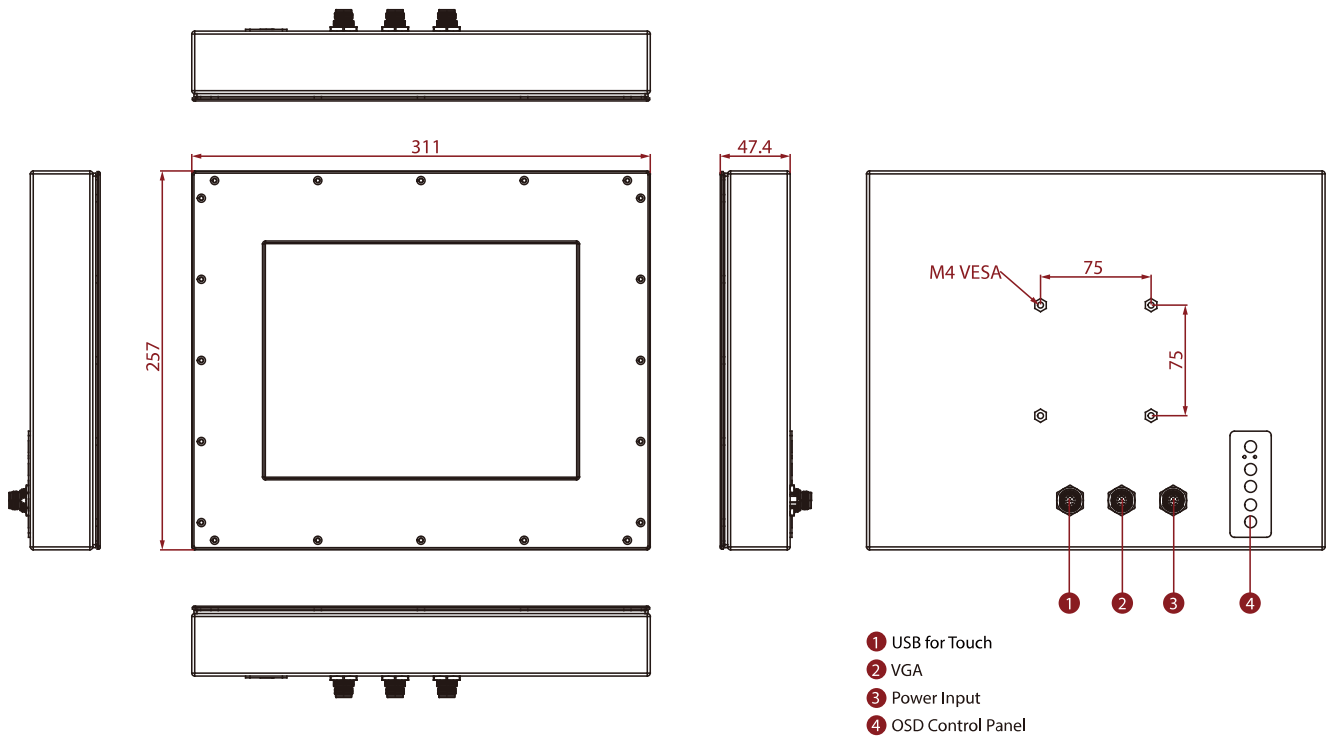


SPECIFICATIONS

Display			
Resolution	1024x768	Size	10.4 inches
Contrast Ratio	1000:1	Panel Brightness	350 nits
Display Color	16.2M Colors	View Angles	88,88,88,88
Type	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function(Optional)		
Mechanical			
Dimension	311 x 257 x 47.4 mm	Mounting	VESA Mount Yoke Mount
Enclosure	Stainless Housing	Cooling System	Fanless design
Environment			
Operating Humidity	10% to 90% (non-condensing)	Operating Temperature	0~45°C
Storage Temperature	-20~60°C	IP rating	IP67
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1x M12 waterproof connector for touch screen control(Optional)	Serial Port	1 x M12 waterproof connector for touch screen control(Optional)
Video	1x M12 type connector for VGA input 1x waterproof DVI input(Optional) 1x M21 type connector for HDMI input(Optional)	Indicator	1 x LED Indicator for power 1 x LED Indicator for status
Control			
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
Accessory			
Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External VGA cable with waterproof connector Waterproof caps Manual	Optional Accessory	Yoke mount stand External HDMI cable with waterproof connector External DVI cable with waterproof connector External USB cable with waterproof connector for touchscreen control External RS232 cable with waterproof connector

Power

Power Rating 12V DC (M12 type)

DIMENSIONS UNIT:MM**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.