

# R19L300-67M1ST

## 19" Full IP67 Stainless Chassis Display



### KEY FEATURES

- 19", 1280 x 1024
- Chassis
- Full IP67 waterproof and dustproof
- Stainless housing SUS 316/AISI 316
- VESA mount
- VGA input




### SPECIFICATIONS

Display	
<b>Resolution</b>	1280x1024
<b>Contrast Ratio</b>	1000:1
<b>Display Color</b>	16.7M Colors
<b>Type</b>	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function(Optional)
<b>Size</b>	19.0 inches
<b>Panel Brightness</b>	250 nits
<b>View Angles</b>	85,85,80,80
Mechanical	
<b>Dimension</b>	457.4 x 369.5 x 62.7 mm
<b>Enclosure</b>	Stainless Housing
<b>Mounting</b>	VESA Mount Yoke Mount
<b>Cooling System</b>	Fanless design
Environment	
<b>Operating Humidity</b>	10% to 90% (non-condensing)
<b>Storage Temperature</b>	-20~60°C
<b>Operating Temperature</b>	0~45°C
<b>IP rating</b>	IP67
Certification	
<b>Certification</b>	CE, FCC
IO Ports	
<b>USB Port</b>	1x M12 waterproof connector for touch screen control(Optional)
<b>Serial Port</b>	1 x M12 waterproof connector for touch screen control(Optional)
<b>Video</b>	1x M12 type connector for VGA input 1x waterproof DVI input(Optional) 1x M21 type connector for HDMI input(Optional)
<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for status
Control	
<b>Button</b>	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button
Accessory	
<b>Accessory</b>	100~240V AC to DC Adapter with waterproof connector Power Cord External VGA cable with waterproof connector Waterproof caps Manual
<b>Optional Accessory</b>	Yoke mount stand External HDMI cable with waterproof connector External DVI cable with waterproof connector External USB cable with waterproof connector for touchscreen control External RS232 cable with waterproof connector

**Power**

**Power Rating** 12V DC (M12 type)

**DIMENSIONS** UNIT:MM

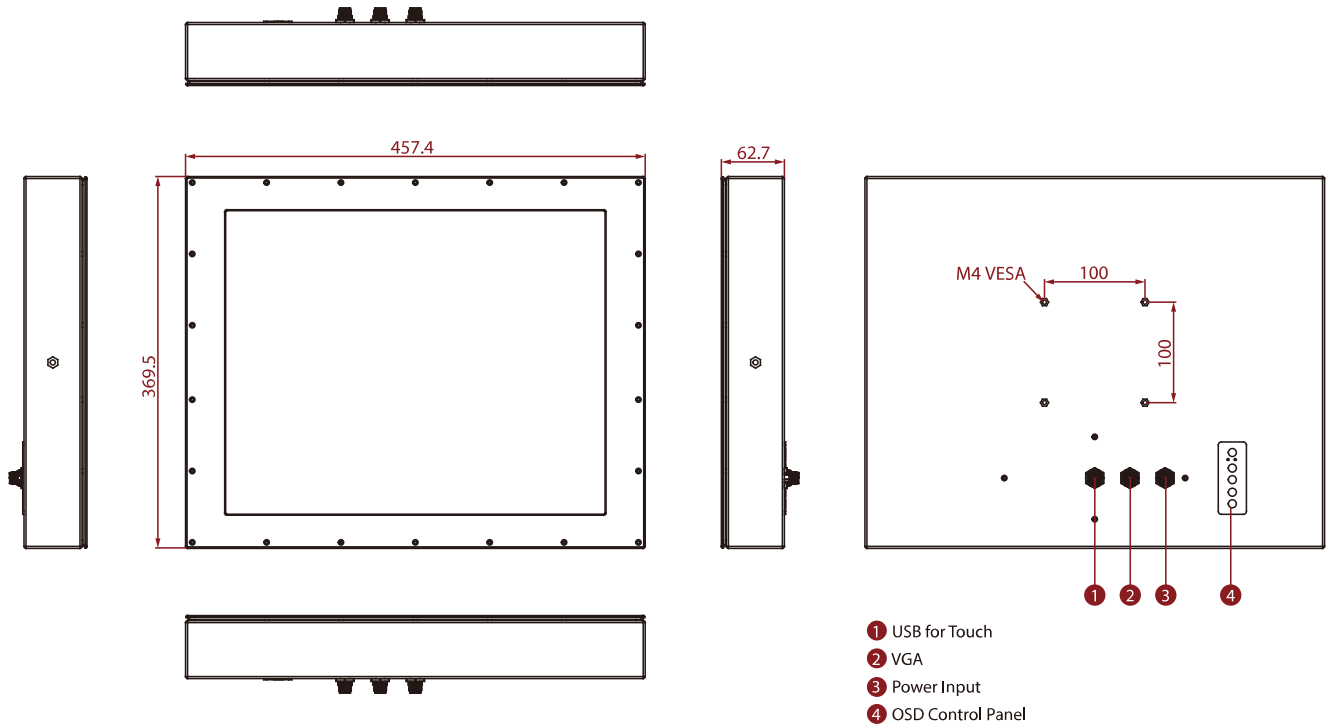

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.