




SCN700-K6

2U POWER AUTOMATION COMPUTER

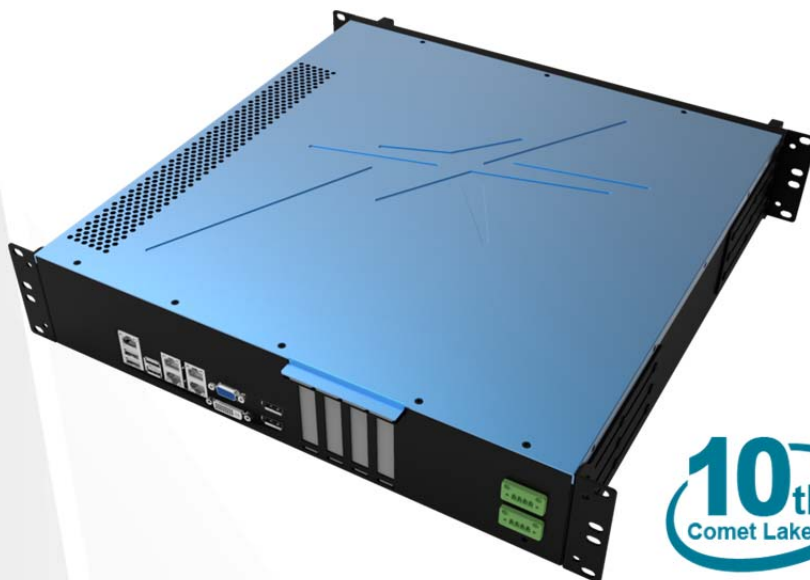

- 10th Comet-Lake i9-10900TE CPU
- Up to DDR4-128GB (non- ECC)
- IPMI, TPM On board
- Dual Redundant DC-DC 110V PSU
- 3 x PCI-E 3.0 Expansions (1x16, 2x4)
- 10GbE, RAID (0/1/5/10) for Options

Specifications

SYSTEM

CPU	10th Generation Intel® Core™ i9/i7/i5 Processors Intel® Core™ i9-10900TE(20M Cache, up to 4.60 GHz) Intel® Core™ i7-10700TE(16M Cache, up to 4.50 GHz) Intel® Core™ i5-10500TE(12M Cache, up to 3.70 GHz)
Chipset	Intel® Q470
Memory type	DDR4 DIMM, up to 128GB
Expansion Slot	1 PCI-E 3.0 x16, 1 PCI-E 3.0 x4 (in x8 slot), 1 PCI-E 3.0 x4 1 M.2 M-Key SATA/PCI-E 3.0 x4, 2280/22110 1 M.2 E-Key CNVi/PCI-E 3.0 x1, 2230
Storage	1 x 2.5" SATA SSD

SYSTEM BIOS

BIOS Type	AMI UEFI
BIOS Features	ACPI 6.1 SMBIOS 3.1 PCI FW 3.0 UEFI 2.6 RTC (Real Time Clock) Wakeup

MANAGEMENT

Software	AMT, IPMI (Intelligent Platform Management Interface) v2.0 with KVM support, SUM, SuperDoctor® 5, vPro, Watchdog
System Management Software	IPMI (Intelligent Platform Management Interface) v1.5 / 2.0 with KVM support

POWER	DC-DC 110V 2x 200W Redundant Power
--------------	------------------------------------

REAR I/O

Power Button	1 with backlight
Indicator	1 HDD backlight
DVD	1 x DVD RW

FRONT I/O

LAN	2 x RJ45 LAN
USB	4 x USB 3.0

Display	2 x DP 1 x DVI 1 x VGA
IPMI	1 x IPMI
Audio	Min-In, Line Out
Trusted Platform Module	TPM Header & Chip both

OPTIONAL

4x 10GbE PCI-E Card	Intel® X550-AT2 10Gb/s 4-port Network module 4 x 10GBASE-T RJ45 LAN ports, Supports 10Gb/s, 1Gb/s per port
2 x 10GbE PCI-E Card	Intel® 82599ES 10Gb/s 2 x LAN port 2 x SFP+ LAN ports, Supports 10Gb/s per port
4 x GbE PCI-E Card	4 x Intel® I350-AM2 1Gb/s 4-port LAN Card 4 x 1000BASE-T RJ45 LAN ports, Supports 1Gb/s, 100Mb/s per port
2 x GbE PCI-E Card	2 x Intel® I350-AM2 1Gb/s 2-port LAN Card 2 x 1000BASE-T RJ45 LAN ports, Supports 1Gb/s, 100Mb/s per port

OS SUPPORT LIST

Windows	Windows 10 Enterprise x64, Windows Server 2016, 2019,
Linux	RedHat Linux EL 8.0, Ubuntu 19.10 , RHEL 7.8, 8.0 64bit, Fedora 31 64bit, SuSE Leap 15.1 64bit, SLES 12 SP5 64bit, Ubuntu 19.10 64bit, CentOS 8.1 64bit
Operating Temp.	-20 to 60°C
Storage Temp.	-40°C to 85°C
Relative Humidity	5% to 95%, non-condensing
System Design	Fanless
Mounting	2U Rackmount
EMC	CE, FCC compliant
Green Product	RoHS, WEEE compliance
Dimension	430 x 396 x 88 mm (W x D x H)

Ordering Information

SCH400-X2

2U 19" Power Automation Fanless Server Computer with Intel® Core™ i5-10500TE Processor, 2x RJ45, 4x USB 3.0, 2 x DP, 1 x DVI, 1 x VGA, 1 x IPMI, 2 x 110V DC DC Redundant Power Supply, DVD RW, Operating Temperature -20~+60°C

Dimension

